




Zilla® Double Stud Flashing

Overview



One or more patents apply to this product including without limitation: US Pat. 8,448,405; 8,707,654; 8,689,517; 8,707,655; and/or 8,752,338.
ZDSFA-15 AL / ZDSFA-15 AL BLK

Zilla® Double Stud Flashing is the strongest watertight flashing on the market today for composition/asphalt shingle roofs providing industry professionals with flexibility and dependability in the field.

- **Strong** – the unique design of the Zilla® Base Plate has a laboratory tested withdrawal strength of 5,240 lbs. using 5/16" lag bolt in Douglas Fir.
- **Versatile** – simple two point installation is compatible with a variety of mounting components and universal attachments for PV, thermal, conduit, pipe or other installations.
- **Superior** – low profile innovative design of the Zilla® Double Stud features a metal-to-metal compression zone that secures and protects the Encapsulated Gland Washer to create a complete water tight seal. The Zilla® Double Stud Flashing provides maximum strength and water protection.

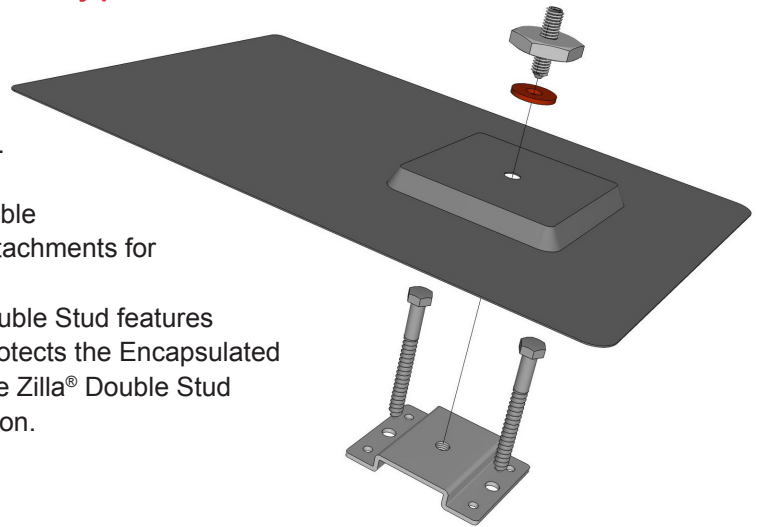


Zilla® Double Stud Flashing Finished Look

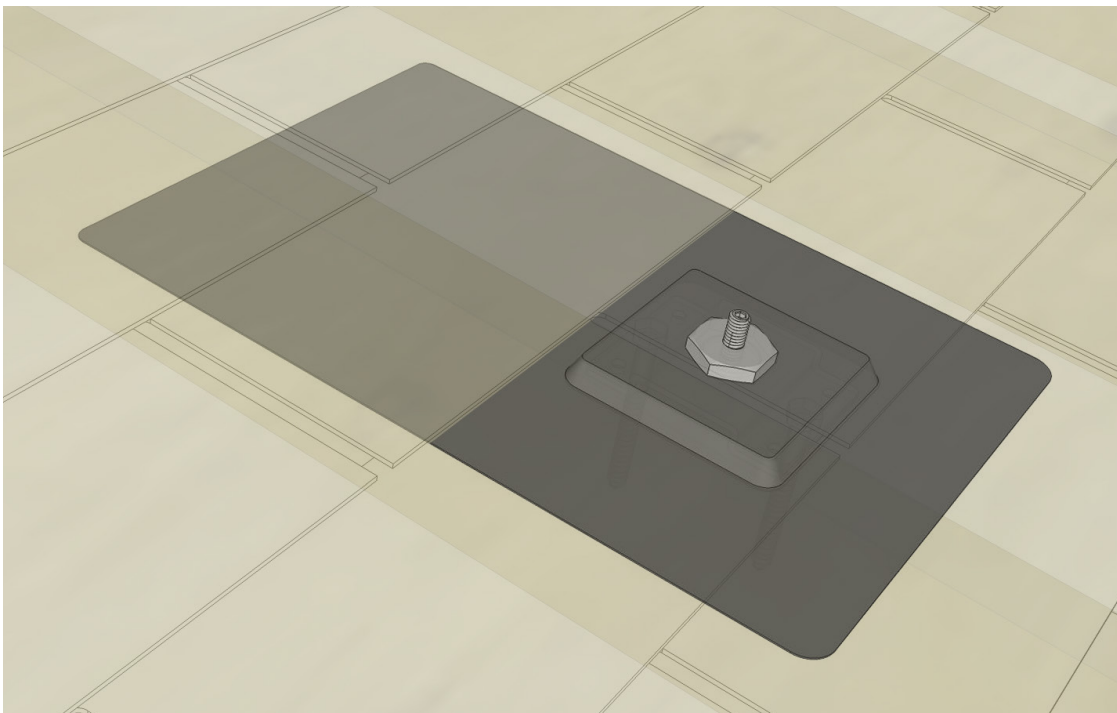

Two point installation



Black



Mill
(custom¹)

¹ Flashing available in Mill and custom colors, call for details and availability, minimum orders may apply.

Zilla® So Simple It's ScarySM

77 Waneka Pkwy • Lafayette, CO 80026 • 720.880.6700 • fax 303.664.1268 • zillarac.com

MADE IN USA MADE WITH RECYCLED MATERIAL © 2017 Zilla Corporation. All rights reserved.

v092917